

RF CURRENT MONITORING PROBE

1 Introduction

The TBCP2-500 is a snap-on RF current monitoring probe, expanding the Tekbox product range of affordable EMC pre-compliance test equipment.

The probe has a flat response with a 3dB bandwidth of 500 MHz and is characterized and usable in the frequency range from 1kHz to 600 MHz.



Picture 1: TBCP2-500 RF current monitoring probe

The aperture of the RF current monitoring probe is 32 mm. Its transfer impedance is 16 dB Ohm, with a 3 dB bandwidth from 1 MHz to 500 MHz.

RF CURRENT MONITORING PROBE

2 Specification

Characterized / usable frequency range: 1 kHz to 600 MHz

Aperture diameter: 32 mm

Outside diameter: 73 mm

Height: 20 mm

Weight: 320 g

Connector type: N female

Transfer impedance: 16 dB Ω in the flat region, typ.

3 dB bandwidth: 1 MHz – 500 MHz, typ.

Max. primary current (DC - 400 Hz): 80 A

Max. primary current (RF): 3 A

Max. core temperature: 125 °C



3 Transfer impedance

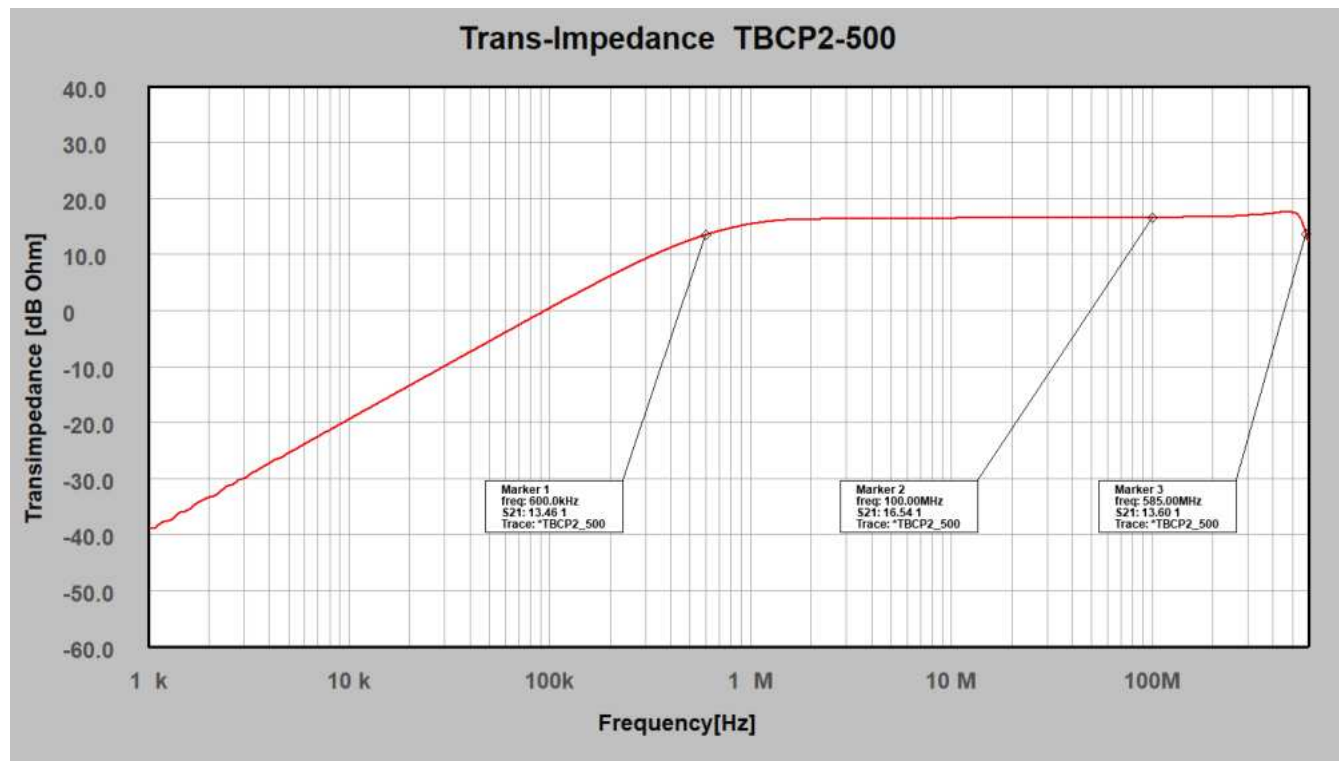


Figure1: typical transfer impedance, 1 kHz to 600 MHz

RF CURRENT MONITORING PROBE

4 Typical transfer impedance table

The table below shows typical transfer impedance data of a TBCP2-500 current probe. Each current probe is delivered with its corresponding measurement protocol. This data can be used for the creation of a correction file for EMCview or similar EMC measurement software. The transfer impedance in dBΩ subtracted from the analyzer reading in dBμV gives the corrected reading in dBμA.

Refer to the application notes of EMCview on how to create a current probe correction file.

Frequency [MHz]	Transfer impedance [dBΩ]	Frequency [MHz]	Transfer impedance [dBΩ]
0.001	-38,83	100	16,54
0.0025	-31,38	125	16,57
0.005	-25,47	150	16,63
0.0075	-21,92	175	16,66
0.01	-19,48	200	16,66
0.0125	-17,53	225	16,71
0.015	-15,99	250	16,76
0.0175	-14,62	275	16,85
0.02	-13,48	300	16,96
0.025	-11,55	325	17,04
0.05	-5,56	350	17,10
0.075	-2,06	375	17,17
0.1	0,40	400	17,28
0.125	2,27	425	17,43
0.15	5,03	450	17,55
0.175	6,11	475	17,56
0.2	9,20	500	17,45
0.25	11,17	510	17,38
0.5	12,51	520	17,27
0.75	14,44	530	17,05
1	15,39	540	16,68
2.5	16,28	550	16,15
5	16,32	560	15,49
7.5	16,38	570	14,76
10	16,44	580	13,99
25	16,55	590	13,18
50	16,56	600	12,22
75	16,52		

Table1: Transfer impedance: 1 kHz to 600 MHz, typical data

RF CURRENT MONITORING PROBE

5 Accessory

Tekbox supplies a calibrator corresponding with the TBCP2 series of snap on current probes:



Picture 2: TBCP2-CAL RF current probe calibration fixture

6 Ordering Information

Part Number	Description
TBCP2-500	Snap on RF current monitoring probe, wooden box, calibration protocol 1 kHz to 600 MHz
TBCP2-CAL	Calibration fixture for TBCP2 current probe series

7 History

Version	Date	Author	Changes
V 1.0	7.12.2020	Mayerhofer	Creation of the preliminary document
V 1.1	28.1.2021	Mayerhofer	Photo update
V 1.2	2.6.2021	Mayerhofer	Data update after mechanical modification
V 1.3	4.8.2021	Mayerhofer	Table 1 corrected
V 1.4	25.3.2024	Mayerhofer	Extended data to 1 kHz – 600 MHz

www.tekbox.com

TekBox Digital Solutions Vietnam Pte. Ltd.

Factory 4, F4, Lot I-3B-1, Saigon Hi-Tech Park, Tan Phu Ward, District 9, Ho Chi Minh City, Vietnam