

GREEN POLY ANTISTATIC BUBBLE PACK

Multilayer polyethylene, green colour, amine-free, heat sealable, recyclable. Small strong barrier bubble provides a superior packaging protection with excellent puncture and tear resistance.


Electrostatic decay: < 2 sec

Rs: < $10^{11} \Omega$

Colour: transparent green

7804.184 Dissipative bubble pack roll
0.5meters x 200meters


7804.185 Dissipative bubble pack roll
1meter x 200meters

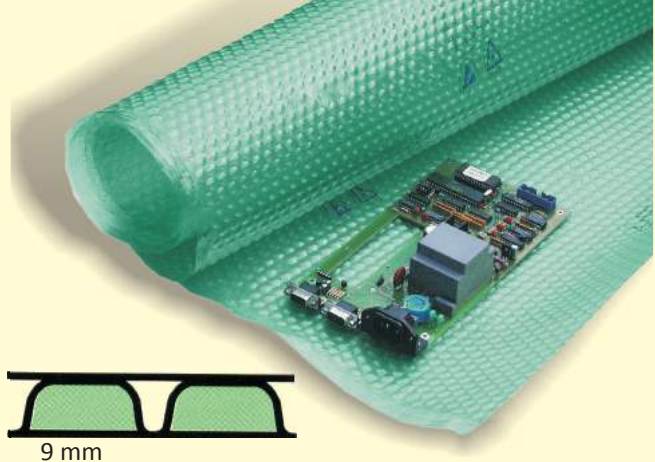

DISSIPATIVE BUBBLE PACK BAGS

Provide superior protection against physical damage during shipping and storage.

	Opening x depth	Closing pad
6604.100	90 x 100mm	30mm
6604.101	100 x 180mm	30mm
6604.102	130 x 185mm	30mm
6604.105	180 x 230mm	30mm
6604.107	250 x 250mm	NO
6604.110	280 x 360mm	30mm
6604.114	300 x 480mm	30mm

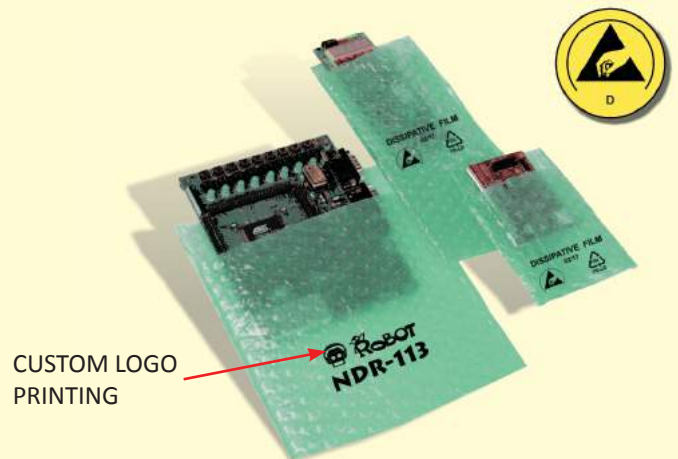

POLYETHYLENE TUBING

6604.210	Black CONDUCTIVE	75 μ m - 100mm width - 500m roll
6604.214	Black CONDUCTIVE	75 μ m - 150mm width - 500m roll
6604.218	Black CONDUCTIVE	75 μ m - 200mm width - 500m roll
6604.224	Black CONDUCTIVE	75 μ m - 250mm width - 500m roll
6604.228	Black CONDUCTIVE	75 μ m - 300mm width - 500m roll
6604.230	Black CONDUCTIVE	75 μ m - 400mm width - 500m roll
6604.239	Green DISSIPATIVE	100 μ m - 75mm width - 250m roll
6604.240	Green DISSIPATIVE	100 μ m - 100mm width - 250m roll
6604.244	Green DISSIPATIVE	100 μ m - 150mm width - 250m roll
6604.248	Green DISSIPATIVE	100 μ m - 200mm width - 250m roll
6604.254	Green DISSIPATIVE	100 μ m - 250mm width - 250m roll
6604.258	Green DISSIPATIVE	100 μ m - 300mm width - 250m roll
6604.260	Green DISSIPATIVE	100 μ m - 400mm width - 250m roll
6604.261	Green DISSIPATIVE	100 μ m - 500mm width - 250m roll
6604.264	SHIELDING	78 μ m - 100m width - 100m roll
6604.266	SHIELDING	78 μ m - 150mm width - 100m roll
6604.268	SHIELDING	78 μ m - 200mm width - 100m roll
6604.270	SHIELDING	78 μ m - 250mm width - 100m roll
6604.272	SHIELDING	78 μ m - 300mm width - 100m roll
6604.275	SHIELDING	78 μ m - 400mm width - 100m roll
6604.280	SHIELDING	78 μ m - 800mm width - 100m roll



SHIELDING BAGS (metal-in)

LABESTAT S85 (packages of 100pcs)

Semi-transparent, heat sealable, the metallised shielding bags offer excellent protection for ESD sensitive devices.

A buried layer of metallic film sandwiched between an inner layer of polyethylene and an outer layer of polyester to provide protection against all static damage without exposing metal surfaces.

Thickness of the film: 78 μm

Transparency: 40%

Surface Resistivity:

-inner layer (polyethylene): $< 10^{11} \Omega$

-intermediate layer (metal): $< 10^2 \Omega$

-outer layer (polyester): $< 10^{11} \Omega$

ZIPLOCK (zippered recloseable bags)

7804.290	100 x 150 mm (4" x 6")
7804.296	150 x 250 mm (6" x 10")
7804.304	250 x 300 mm (10" x 12")
7804.306	300 x 400 mm (12" x 16")



opening x depth

7804.268	76 x 127 mm (3" x 5")
7804.270	100 x 150 mm (4" x 6")
7804.272	125 x 200 mm (5" x 8")
7804.274	150 x 200 mm (6" x 8")
7804.276	150 x 250 mm (6" x 10")
7804.278	200 x 250 mm (8" x 10")
7804.280	200 x 300 mm (8" x 12")
7804.284	250 x 300 mm (10" x 12")
7804.285	250 x 350 mm (10" x 14")
7804.286	300 x 400 mm (12" x 16")
7804.287	400 x 500 mm (16" x 20")
7804.288	450 x 450 mm (18" x 18")
7804.310	400 x 450 mm (16" x 18")
7804.312	450 x 680 mm (18" x 27")

CONDUCTIVE BAGS

LABESTAT C75 (package of 100pcs)

Made from black multilayer polyethylene layflat tubing are available in many sizes. All bags are printed with the ESD logo and text in conformity to IEC61340-5-1. Don't use for packaging PCBs with on-board batteries.

Thickness of the film: 75 μm

Surface Resistivity: $\leq 10^5 \Omega$



opening x depth

7804.210	100 x 150 mm (4" x 6")
7804.212	100 x 200 mm (4" x 8")
7804.214	150 x 200 mm (6" x 8")
7804.216	150 x 250 mm (6" x 10")
7804.218	200 x 250 mm (8" x 10")
7804.220	200 x 300 mm (8" x 12")
7804.222	200 x 350 mm (8" x 14")
7804.224	250 x 300 mm (10" x 12")
7804.226	250 x 350 mm (10" x 14")
7804.228	300 x 400 mm (12" x 16")
7804.230	400 x 450 mm (16" x 18")

DISSIPATIVE BAGS

LABESTAT A100 (package of 100pcs)

Material: Polyethylene, green colour amine-free, heat sealable, recyclable

Print: ESD and Recycle logos, production batch

Thickness: 100 μm

Rs: $< 10^{11} \Omega$



opening x depth

7804.239	76 x 127 mm (3" x 5")
7804.240	100 x 150 mm (4" x 6")
7804.242	100 x 200 mm (4" x 8")
7804.237	100 x 460 mm (4" x 18")
7804.244	150 x 200 mm (6" x 8")
7804.246	150 x 250 mm (6" x 10")

opening x depth

7804.247	150 x 300 mm (6" x 12")
7804.248	200 x 250 mm (8" x 10")
7804.250	200 x 300 mm (8" x 12")
7804.252	200 x 350 mm (8" x 14")
7804.254	250 x 300 mm (10" x 12")
7804.256	250 x 350 mm (10" x 14")
7804.257	300 x 350 mm (12" x 14")
7804.258	300 x 400 mm (12" x 16")
7804.260	400 x 500 mm (16" x 20")
7804.262	400 x 600 mm (16" x 24")
7804.267	450 x 550 mm (18" x 22")

CLEAR DISSIPATIVE TAPE



Clear Dissipative Tape used to seal shielding bags or boxes.

Generates low electrostatic charge and can be used in EPA.

Material: Cellulose based tape with rubber based adhesive.

Rs: $10^9 - 10^{11} \Omega$

T1000: 2 sec at 25% rH

7807.180 Clear Dissipative Tape 12mm x 66m

7807.181 Clear Dissipative Tape 24mm x 36m